

# nifty

# HR10

**SELF PROPELLED  
ACCESS PLATFORM**



**10m (33ft)**  
Working Height


**4.50m (14ft 9in)**  
Working Outreach

**Weight Under 2 Tonnes**  
Low cost transportation

**Bi-Energy Power  
Available**  
Optimising utilisation

**Fully Proportional  
Hydraulic Controls**  
Designed for maximum operator  
efficiency

**1.40m Narrow  
Chassis Available**  
Improved narrow aisle access

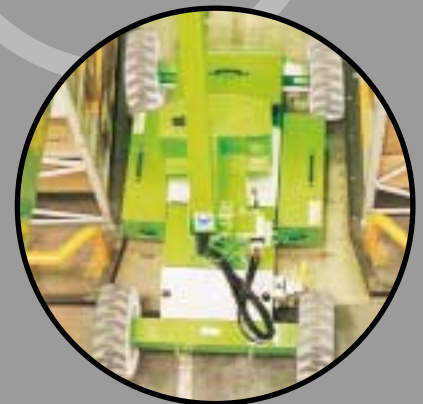

**niftylift.com**




# nifty

## Heightrider 10

The Nifty Height Rider 10 provides excellent reach capabilities from a compact and very low weight base. The narrow option gives 1.40m (4ft 7in) access and a tight turning circle means superb manoeuvrability in restricted areas. Transportation is easy due to its low overall weight and a choice of power options makes this an ideal entry machine to the self-propelled market.

### Safety Features

- ▶ Automatic failsafe brakes
- ▶ Tilt alarm
- ▶ Foam filled or solid tyres
- ▶ Emergency descent system with hand-pump
- ▶ Dual controls (platform & base)
- ▶ Lock valves on all hydraulic cylinders
- ▶ Dual harness points
- ▶ CE Mark

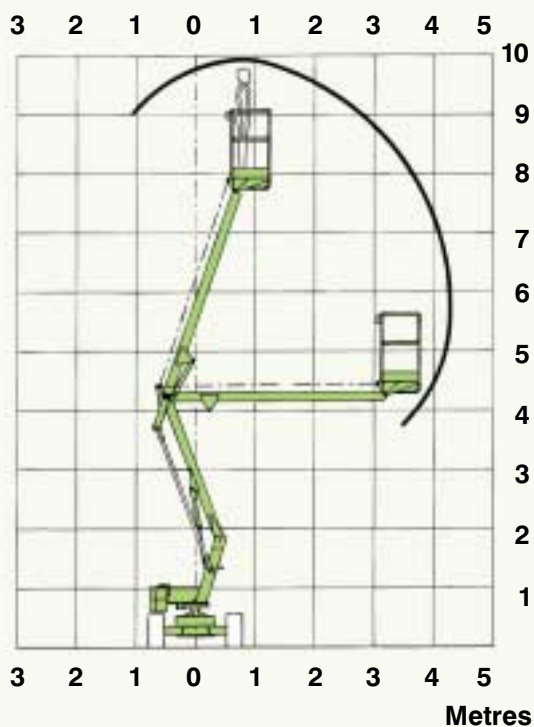

With a super narrow version at only 1.40m (4ft 7in) wide, operating in the tightest working environments is now possible.



With fully proportional hydraulic controls, the HR10 is easy to operate and position making it ideal for a wide range of applications.

### Specifications

<b>Working Height</b>	10m	33ft
<b>Platform Height</b>	8m	26ft 4in
<b>Working Outreach</b>	4.50m	14ft 9in
<b>Width [Standard]</b>	1.50m	4ft 11in
<b>[Narrow]</b>	1.40m	4ft 7in
<b>Height Stowed</b>	1.96m	6ft 5in
<b>Overall Length</b>	4.25m	13ft 11in
<b>Weight [Standard]</b>	1930kg	4255lbs
<b>[Narrow]</b>	2150kg	4740lbs
<b>Turning Radius (inside)</b>	2.25m	7ft 5in
<b>(outside)</b>	4.22m	13ft 10in
<b>Platform Capacity</b>	200kg	440lbs
<b>Platform Size</b>	1.10m x 0.60m	3ft 8in x 2ft 1in
<b>Tyres</b>	Foam filled, solid or non-marking	
<b>Brake System</b>	Dual automatic failsafe braking system	
<b>Control System</b>	Fully proportional hydraulic controls	
<b>Power Options</b>	Bi-Energy (engine and battery) Battery only Petrol or diesel engine only	

Due to a policy of continuing development and improvement Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms

**Niftylift Ltd**

Fingle Drive  
Stonebridge  
Milton Keynes  
MK13 0ER  
England

www.niftylift.com

e.mail: info@niftylift.com

Tel: +44 (0)1908 223456

Fax: +44 (0)1908 312733

